



CTC 950

- Wall mounted oil or gas-fired unit
- High efficiency
- Easy installation
- Low weight
- Small dimensions
- Balanced flue system
- Unique heat transmission
- Easy maintenance
- Extremely low noise level
- Easy to service
- All connections downward

CTC 950

A compact wall mounted oil or gas-fired unit. The low weight of the unit facilitates the installation

The CTC 950 is available in 2 models:


- With built in heat exchanger that gives fresh hot water quickly and effectively.
- With DHW storage heater.

The heat exchanger produces fresh hot water according as you use it. The storage water heater stores the domestic hot water in an effective way.

A special sound absorbing air inlet on the burner part provides an absolute low noise operation.

The incorporated circulating pump, expansion vessel and safety valve control box guarantee a complete unit for comfortable heating.

CTC 950		950 V	950 R
Output	kW	23,3	23,3
Input	kW	25	25
Weight (full equipped)	kg	112	109
Burning efficiency	%	92	92
Fluegas temperature (in accordance to EN 303/304)	°C	195	195
Water content	l	23	23
Sanitary hot water $\Delta T = 25^{\circ}C$	l/min	13	-
Flue gas outlet	\varnothing mm	80	80
Air inlet	\varnothing mm	80/125	80/125
Heating flow		R 3/4"	R 3/4"
Heating return		R 3/4"	R 3/4"
Sanitary hot/cold water		R 1/2"	-
Expansion vessel	l	10	10
Dimensions	mm	H 904, L 700, D 570	H 904, L 700, D 570
Working pressure	bar	3	3
Test pressure	bar	4	4

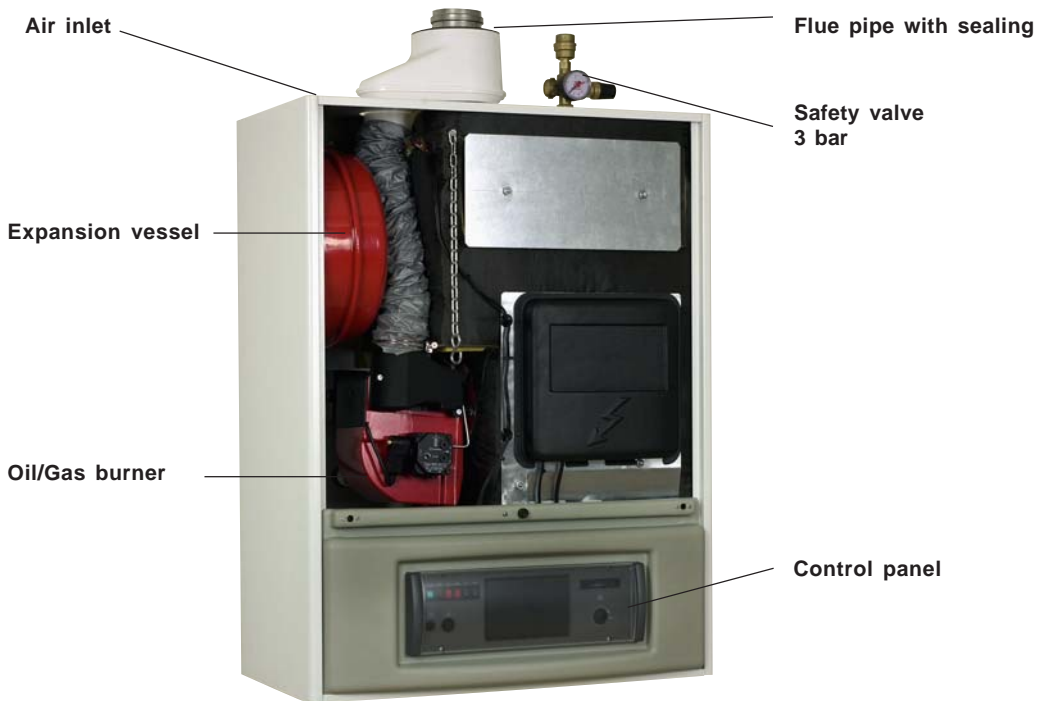

Scope of delivery

Boiler CTC 950
 Burner of make Bentone
 Circulating pump
 Expansion vessel
 Heat exchanger*

* Model with heat exchanger.

Accessories

Control equipment Bentone Bas
 Shunt valve



P.O. Box 309, S-341 26 Ljungby, Sweden
 Tel + 46 372 880 00 Fax +46 372 824 94